


## PLASTIC QUICK COUPLING VALVE

### Features:

- Available in 3/4” and 1”
- Click Lock on lid
- Stainless Steel Spring
- Specially designed grommet
- UV Stabilized
- Rugged two piece valve body design
- “Turn & Lock” Key with ribbed grip
- Designed for application in public area
- Rain Bird Compatible



Flow Rate (LPM)	Headloss (Bar)
28.0	0.016
38.6	0.031
43.5	0.040
49.6	0.052
55.3	0.065
62.1	0.082
68.5	0.101
75.7	0.124
82.9	0.149
90.8	0.180
98.8	0.213
107.5	0.253
115.8	0.295
124.2	0.340
131.0	0.379
139.3	0.430
145.3	0.469
149.9	0.499
156.3	0.544
160.5	0.574
165.4	0.611

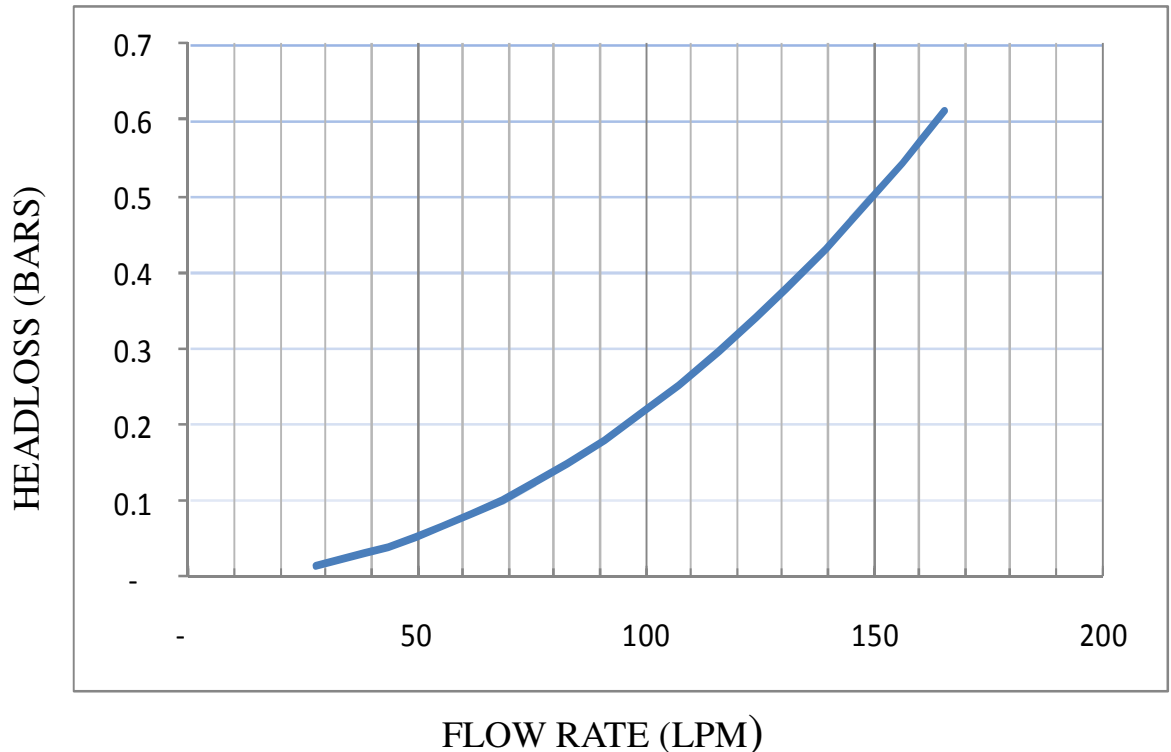

\* Curve is obtained in normal conditions. Tested in CIT, California State University-USA

### IRRILINE Technologies Corp.

1400-1500 West Georgia Street, Vancouver, BC, V6G 2Z6, Canada.

Tel : 001 604 6084315, Fax: 001 604 6084319,

E-mail: sales@irriline.com Web : www.irriline.com

Member



Irrigation Association

Member



Irrigation Industry Association of British Columbia

