


IR-15 L

- 1/2" BSP/NPT male threads
- Low Trajectory Angle – 7°
- Spool made of Plastic (Nylon)
- Bronze Body & Arm, Brass Bearing Sleeve & Nipple



Meters	mm / hr
0.61	9.10
1.22	8.90
1.83	9.60
2.44	11.5
3.05	11.8
3.66	13.6
4.27	14.4
4.88	15.4
5.49	18.3
6.10	19.1
6.71	18.1
7.32	12.4
7.92	04.9
8.53	00.1

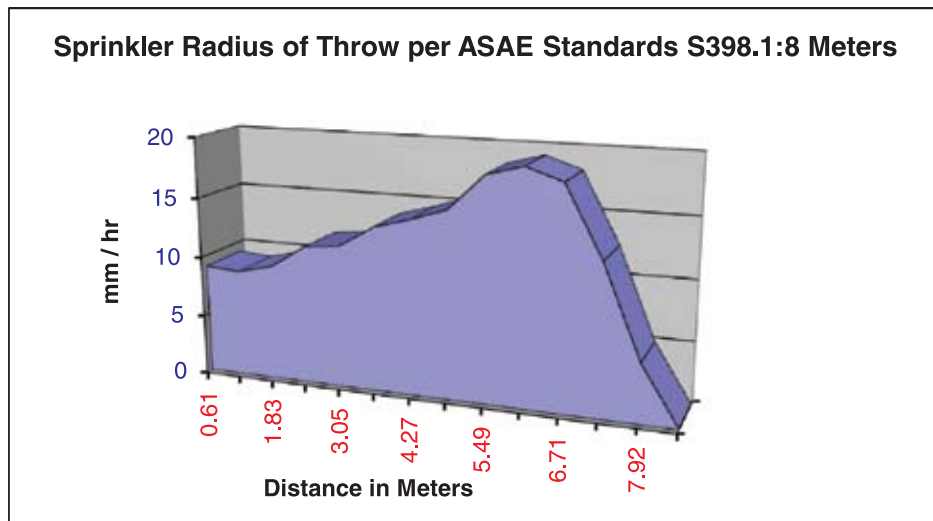

Base Pressure(KPA)	200
Flow Rate (LPM)	16.69
Nozzle Size	3.17 mm
Date /Time of test	5/2/2008 11:15
Testing Facility	C.I.T
Mins ./Revolution	0.08
Riser Height (cm)	61
Degree of Arc	360

Pressure In Kg/ cm ²	Nozzle Size in mm							
	3.20		3.50		4.00		4.40	
	Lit / hr	Ø mts	Lit / hr	Ø mts	Lit / hr	Ø mts	Lit / hr	Ø mts
0.35	162.00	9.00	216.00	9.50	270.00	10.00	354.00	11.00
0.70	234.00	11.00	270.00	12.00	354.00	12.00	480.00	13.00
1.05	300.00	12.00	354.00	13.00	492.00	13.00	570.00	14.00
1.41	354.00	12.50	238.00	13.50	558.00	14.00	654.00	14.50
1.76	438.00	13.00	504.00	14.00	630.00	14.50	726.00	15.50
2.11	504.00	13.50	558.00	14.50	696.00	15.00	792.00	16.00
2.46	558.00	15.00	600.00	15.50	750.00	15.50	858.00	16.50
2.81	600.00	15.50	642.00	16.00	816.00	16.00	954.00	17.50