


IR-20

- 1/2" BSP / NPT male threads
- Normal Angle 24°
- Bronze Body & Arm, Brass Bearing Sleeve & Nipple



Meters	mm / hr
0.61	5.6
1.22	3.7
1.83	3.2
2.44	1.7
3.05	1.4
3.66	1.1
4.27	0.8
4.88	0.6
5.49	0.4
6.10	0.4
6.71	0.4
7.32	0.6
7.92	0.8
8.53	1.0
9.14	1.4
9.75	1.8
10.36	1.7
10.97	0.7
11.58	0.1

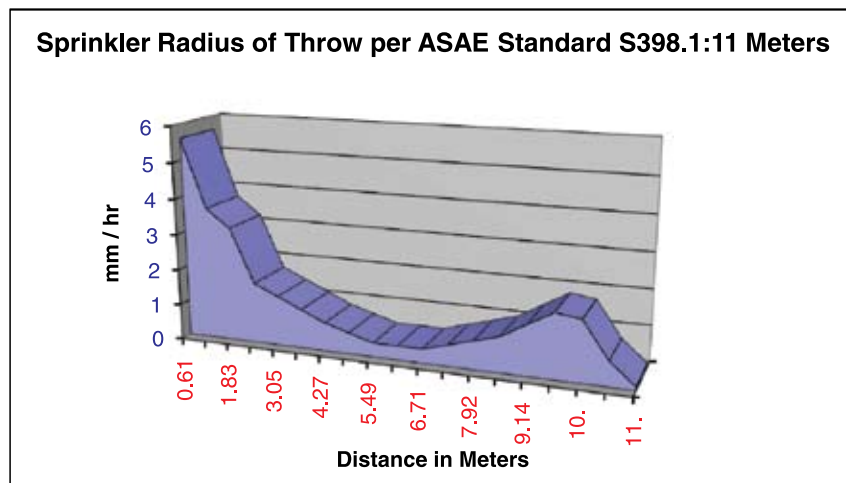

Base Pressure(KPA)	200
Flow Rate (LPM)	7.72
Nozzle Size	2.77 mm
Date /Time of test	6/2/2008 8:30
Testing Facility	C.I.T
Mins ./Revolution	0.83
Riser Height (cm)	61
Degree of Arc	360

Pressure In Kg/ cm ²	Nozzle Size in mm							
	2.40		2.80		3.20		3.50	
	Lit / hr	Ø mts	Lit / hr	Ø mts	Lit / hr	Ø mts	Lit / hr	Ø mts
2.07	288.00	20.70	432.00	21.00	540.00	21.30	708.00	21.60
2.41	312.00	21.90	462.00	22.00	570.00	22.20	786.00	22.50
2.76	336.00	22.50	510.00	23.00	618.00	23.20	864.00	23.50
3.10	354.00	23.00	540.00	23.50	630.00	23.80	912.00	24.00
3.45	378.00	23.50	552.00	23.80	696.00	24.00	936.00	24.40
4.14	408.00	24.00	630.00	24.40	756.00	24.70	972.00	25.00
4.48	426.00	24.30	648.00	24.70	786.00	25.00	1020.00	25.30