


IR-25

- Part Circle
- ½” BSP / NPT male threads
- Bronze Body & Arm, Brass Bearing Sleeve & Nipple
- Standard trajectory angle for maximum distance of throw.



Meters	mm / hr
0.61	27.8
1.22	19.3
1.83	18.3
2.44	12.7
3.05	10.7
3.66	9.4
4.27	8.4
4.88	7.8
5.49	6.0
6.10	5.4
6.71	4.5
7.32	4.1
7.92	2.9
8.53	1.5
9.14	0.4

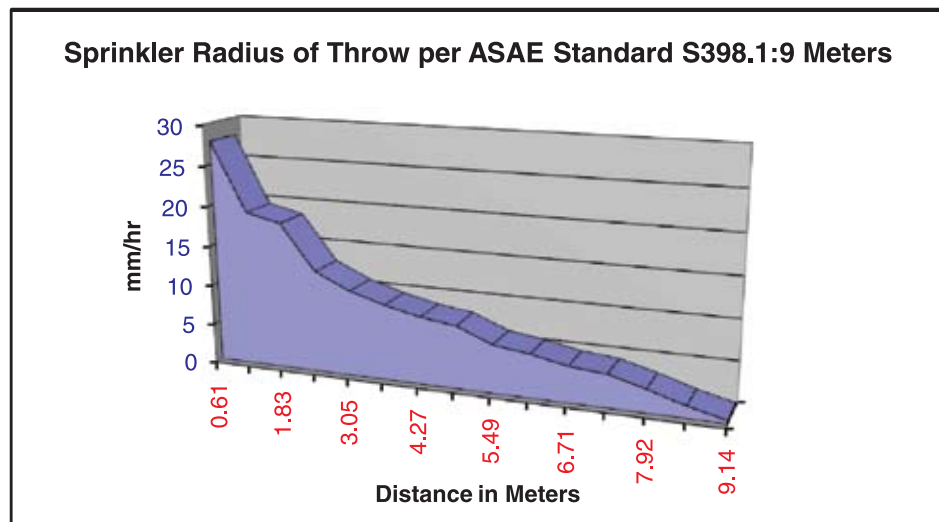

Base Pressure(KPA)	200
Flow Rate (LPM)	15.52
Nozzle Size	3.97 mm
Date /Time of test	6/2/2008 15:30
Testing Facility	C.I.T
Mins ./Revolution	0.11
Riser Height (cm)	61
Degree of Arc	180

Pressure In Kg/ cm ²	Nozzle Size in mm			
	3.5		4.0	
	Lit / hr	Ø mts	Lit / hr	Ø mts
2.0	684.00	22.90	828.00	23.50
2.5	792.00	23.40	936.00	24.00
3.0	864.00	23.80	1044.00	24.50
3.5	900.00	24.30	1152.00	25.00